



ROYAL RAINFALL LED SHOWER SYSTEM SPECIFICATIONS




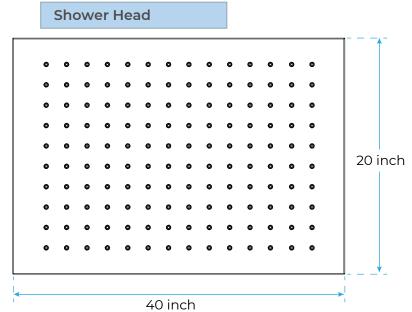

Stainless Steel Construction, Corrosion- resistant, Anti-rust With rubber nozzles, it's very esay to clean and replace.

The flow rate of the shower head is 2.5 GPM / 9.5 LPM. Recommended water pressure is 0.3~0.6 MPa (3~6 bar) for 20" shower heads.

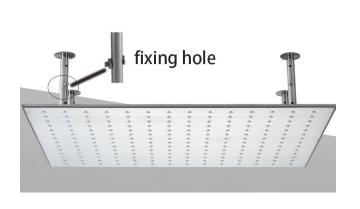



Product shown is only for installation display purpose

(If you have opted for LED option)

The LED light will change its color by detecting water temperature:


0-30°C (32-86°F): Blue LED 30-40°C (86-104°F): Green LED 40-50°C (104-122°F): Red LED 50-100°C (122-212°F): Flashing Red LED ■ ■


Note: The LED lights are powered by water flow, and will be activated once the water is turned on.



Fontana Showers®

Body Jet

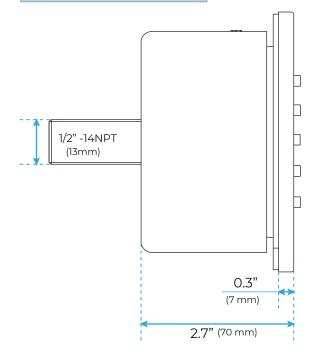

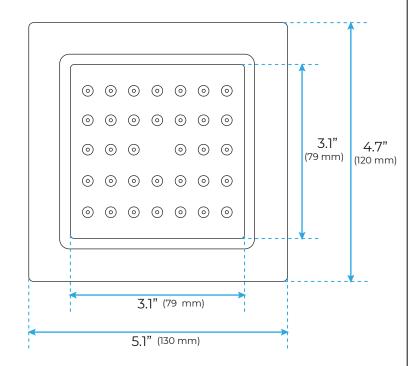

FEATURES

Material: Brass Base Plate Height: 5-1/8" Base Plate Width: 5-1/8"


Jet Surface Area: 3-1/8"

Surface Depth: 1/4" Adjustment Angle: 5°

Male NPT Connection: 1/2"


Maximum Flow Rate: 2.5 GPM (9.5L/min) max @ 80 psi

Hand Shower

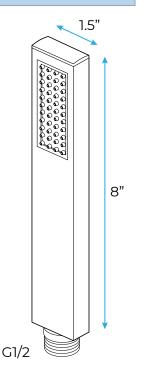

Flow Rate: 2.0 GPM / 7.6 LPM

Shower Mixer Connections

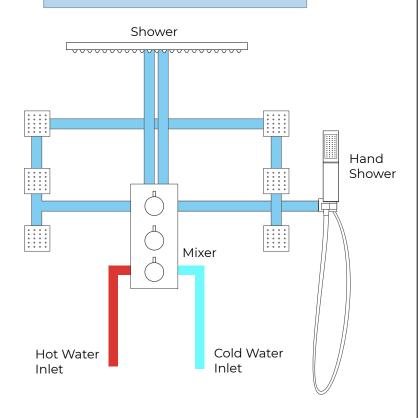

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

