

# FONTANA SHOWERS

## Fontana Wall-Mounted Faucet Equipped with Round Pin Wall Mixer In Brushed Gold Finish

Product Code: FS-6549BG



### BEFORE YOU BEGIN

Before you begin, please read the installation instructions below. Observe all local building and safety codes.

Unpack and inspect the items for any shipping damages. If you find damages, do not install.

Please note all products must be installed by a professional and certified plumber otherwise warranty might be voided.

### POSSIBLE TOOLS REQUIRED\*



Plumbers Tape



Tape Measure



Level



Adjustable Wrench



Hex Wrench



Thread Sealant



Drill



Pencil or Marker




Screwdriver


\*not included

### Wall Mount Installation


#### Step 1:

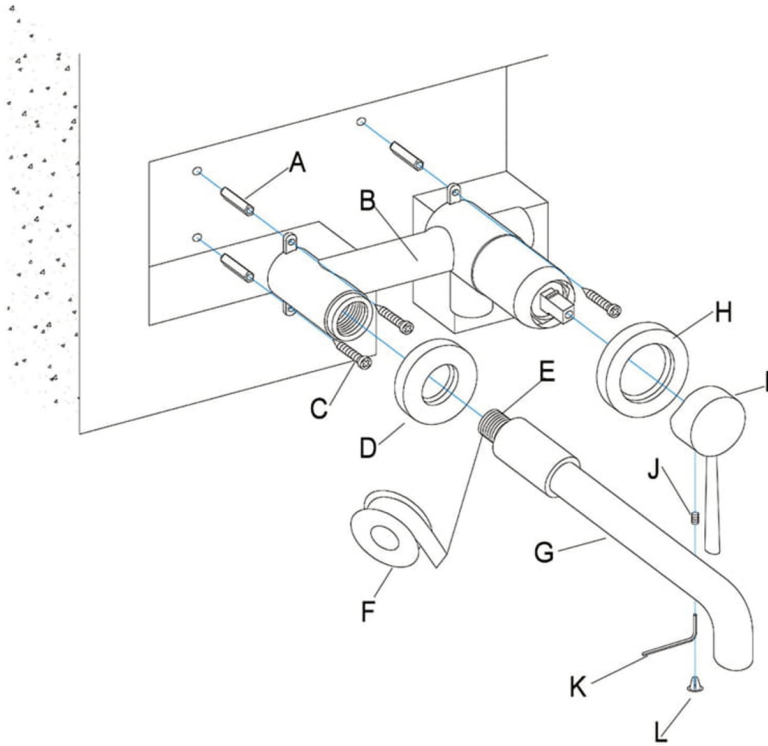


#### Step 2:

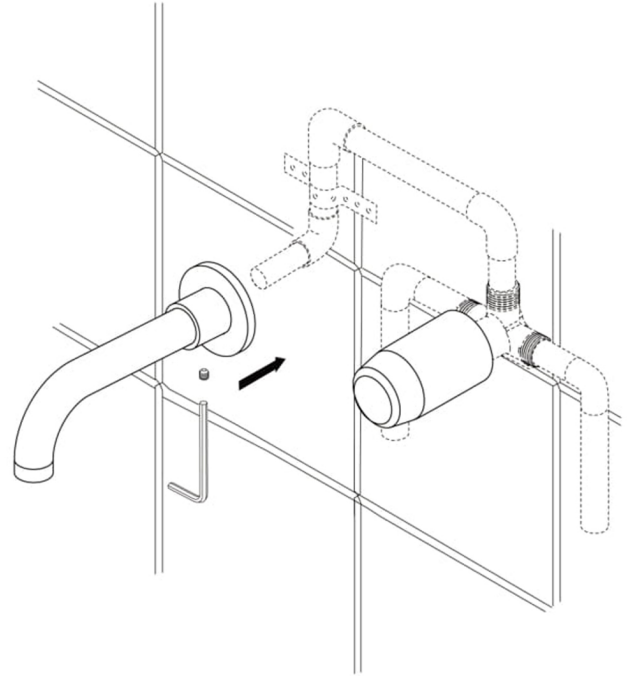

#### Step 3:

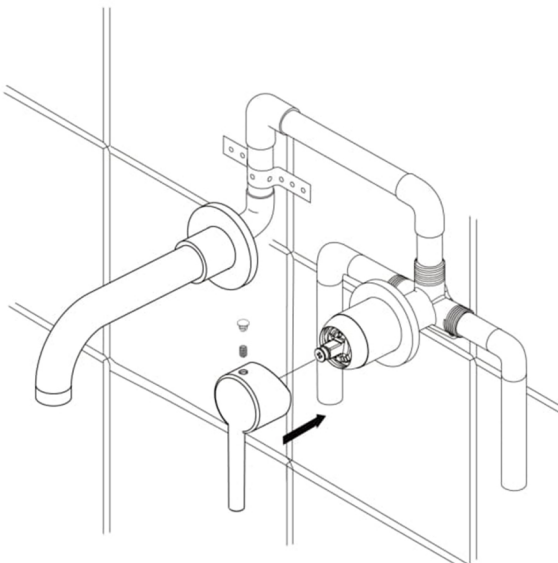


#### Step 4:

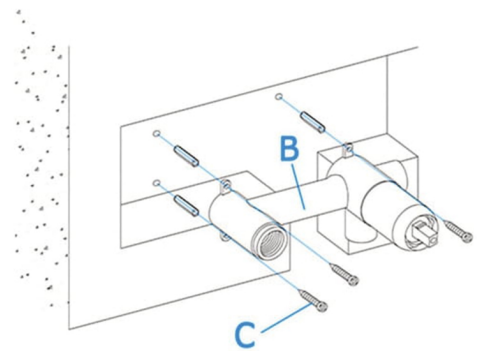


## Fontana Wall-Mounted Faucet Equipped with Round Pin Wall Mixer In Brushed Gold Finish

Product Code: FS-6549BG


### Step 5:

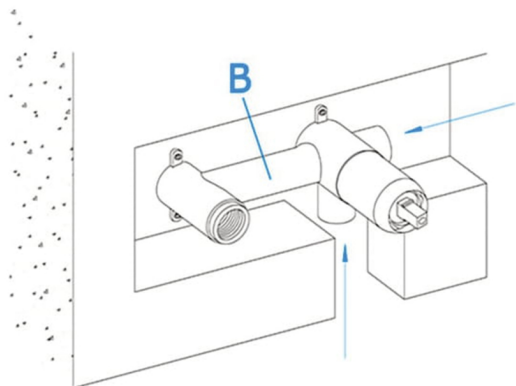


### Step 6:

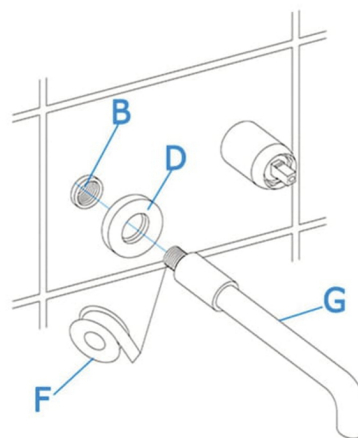

### Step 7:

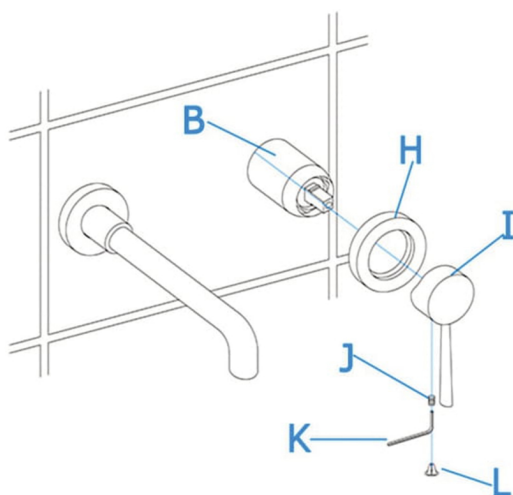

### Step 8:

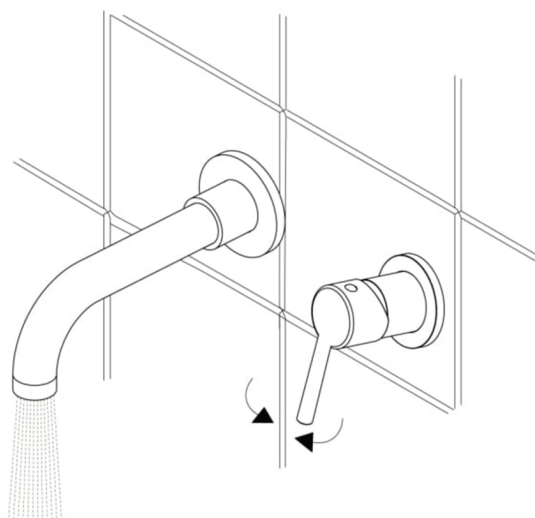



1. Position and fix the valve body (B) into the wall with screws (C). Make sure that the valve body (B) is completely level.
2. Connect hot and cold water inlets of the valve body (B) to the main water supply. (Solid copper pipes are recommended for the connection.)
3. Apply Teflon tape (F) to the threaded tail pipe of the spout body (G). Then press escutcheon (D) firmly against the finished wall and screw the spout body (G) through escutcheon (D) into the valve body (B) tightly.
4. Place the cover plate (H) to the valve body (B) and press it against the finished wall. Install the handle (I) and fix the set screw (J) with Allen key (K), then put on the indication button (L).

## Fontana Wall-Mounted Faucet Equipped with Round Pin Wall Mixer In Brushed Gold Finish

Product Code: FS-6549BG

### Care & Cleaning:

1. The product can be cleaned with warm water, a mild soap and a clean soft cloth.
2. Clean progressively and gently.
3. It is not required to use any abrasive cleaning pads, wire wool or micro-fibre cloths to clean the product.
4. Avoid a vigorous cleaning action, as this could contribute to denaturing and dulling the finish.
5. Abrasive or strong cleaning products containing ammonia, bleaches, alcohol, dyes, acids (hydrochloric, formic, phosphorus, chlorine or acetic) will be detrimental to the product finish.
6. If using a spray cleaner, apply the cleaning agent onto a soft cloth, never directly spray onto the product as the cleaner may enter gaps and openings and cause damage. Do not allow the cleaner to remain on the product for a period of time. After cleaning, rinse thoroughly with clean water

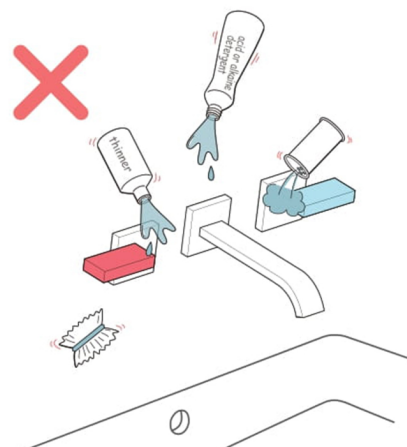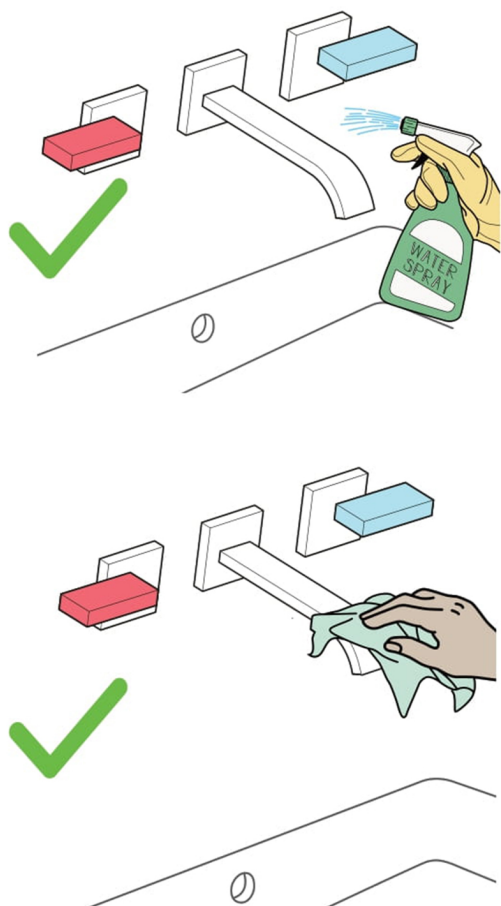

### Flexible Connecting Hose:

Care must be taken when connecting the flexible connection hose from the power supply box to the spout to ensure it does not bend sharply and kink or twist. See above for recommended ways to fit the flexible connecting hose.

Important: Failure to follow these guidelines may result in poor performance and damage to the flexible connection hose.

