



BEFORE YOU BEGIN

Before you begin, please read the installation instructions below. Observe all local building and safety codes.

Unpack and inspect the items for any shipping damages. If you find damages, do not install.

Please note all products must be installed by a professional and certified plumber otherwise warranty might be voided.

POSSIBLE TOOLS REQUIRED*



Plumbers Tape



Tape Measure



Level



Adjustable Wrench



Hex Wrench



Thread Sealant



Drill



Pencil or Marker




Screwdriver

*not included

Table of Contents

Accessories

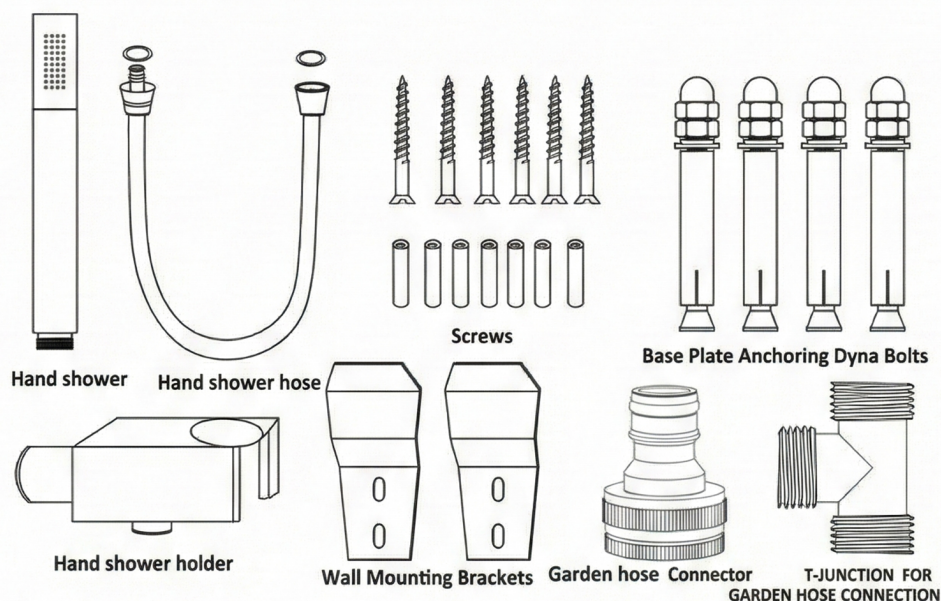


Installation

OPTION A:


FREESTANDING SHOWER PANEL INSTALLATION

This method is to be used if you would like to install this unit as a Freestanding Shower using the base plate (Not Wall Mounted).

1. Decide where you would like to position your shower, i.e. next to a swimming pool, on the decking or in your backyard.
2. Remove the base plate from the shower panel (simply slide it out)




3. Mark the position of the four holes in the base plate on the ground for where your anchoring dyna bolts will be secured

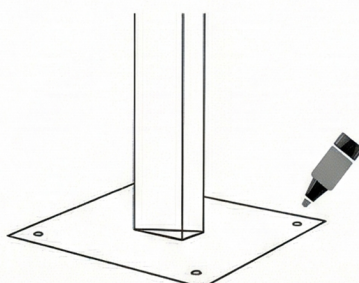


Fontana Provins Black Aluminum Outdoor 40L Solar Shower

Product Code: FS7501MB

4. Position/Run your Hot & Cold Mains water pipes & bring the pipes to a height of 320mm/12.6" above the ground finished with the male iron union
5. Use an electric drill to drill holes for dyna bolts on the ground where you have marked.
6. Punch the four anchor screws/dyna bolts into the prepared holes in the ground.

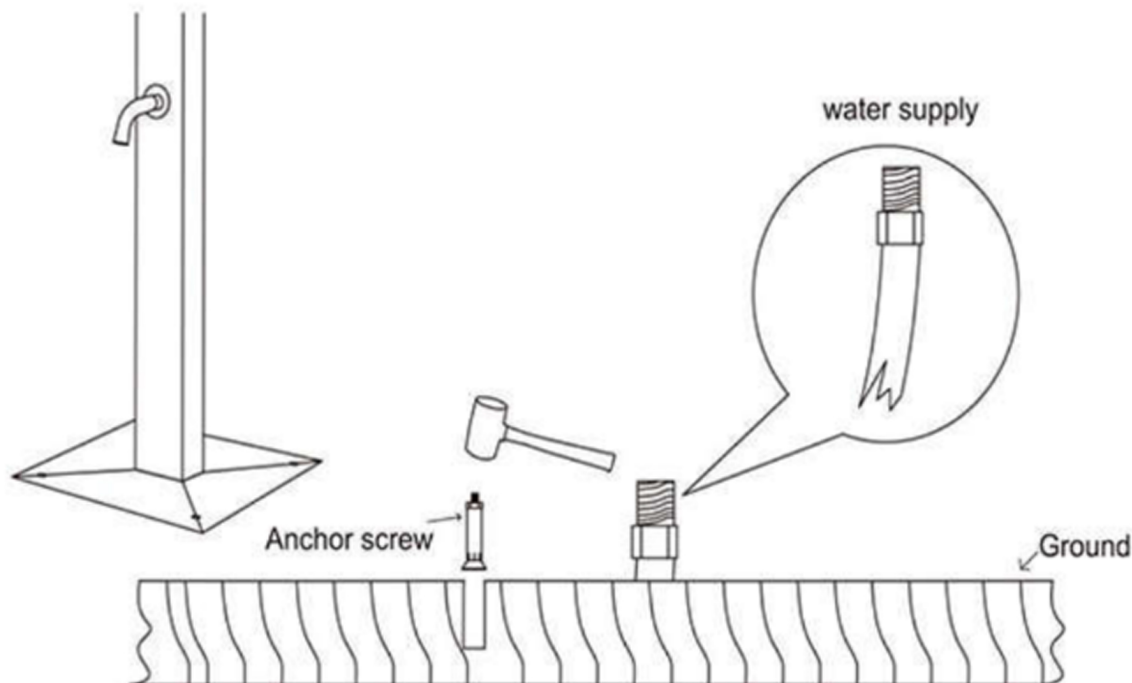


7. Secure the base plate using the 4 x Dyna bolts on top of the pipes, with pipes protruding through the center of the base
8. Remove the back panel of the shower

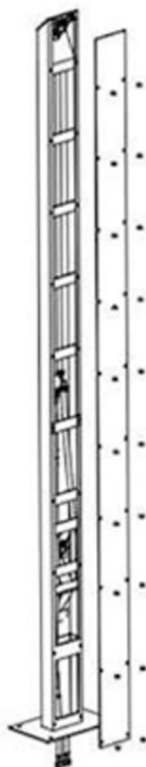

Fontana Provins Black Aluminum Outdoor 40L Solar Shower

Product Code: FS7501MB

9. Connect the braided hoses with male iron unions to the female unions supplied with the easy hookers inside the shower panel to the ground water outlet (if your shower has a hot and cold mixer, the blue braided hose connects to the cold-water outlet and the red braided hose connects to the hot water outlet).

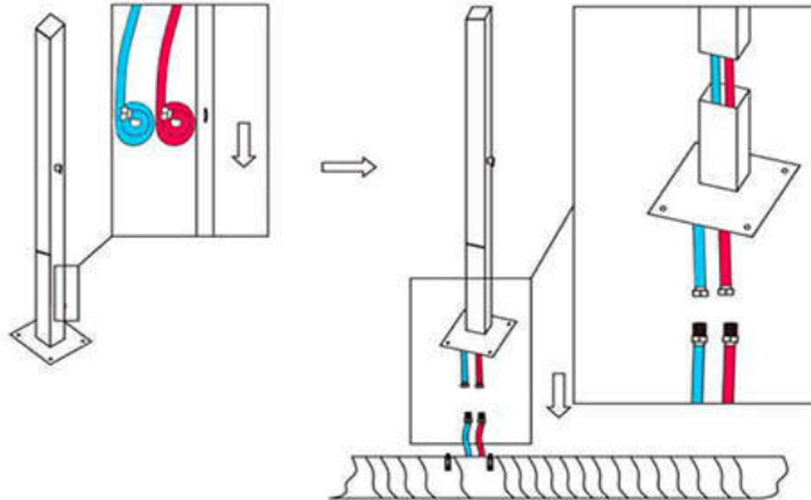


10. Re-attach the back panel and Enjoy Your New Shower !

OPTION B:

WALL MOUNTING SHOWER PANEL INSTALLATION

This method is to be used if you would like to wall mount this unit. Please note, the **Base Plate will Not be required** for this method of installation.


1. In order to wall mount this shower you will need to remove the back panel first

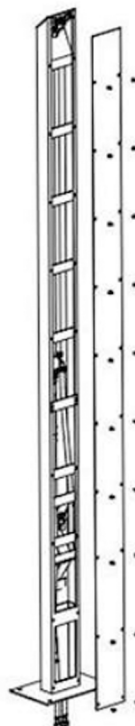

Fontana Provins Black Aluminum Outdoor 40L Solar Shower

Product Code: FS7501MB

2. Fix the 2 wall mounting brackets, that are supplied with the shower, to the wall where you would like the shower to be positioned and where the water mains have been set up. Make sure to space the mounting brackets to fit the cross bars at the rear of the shower panel.
3. Connect your shower to the Main Hot & Cold-water supply & mount the shower panel by the cross bars on to the mounting brackets
4. Once the wall mounting installation is complete, seal the sides of the shower panel with clear silicone on either side of the shower panel and Enjoy Your New Shower!

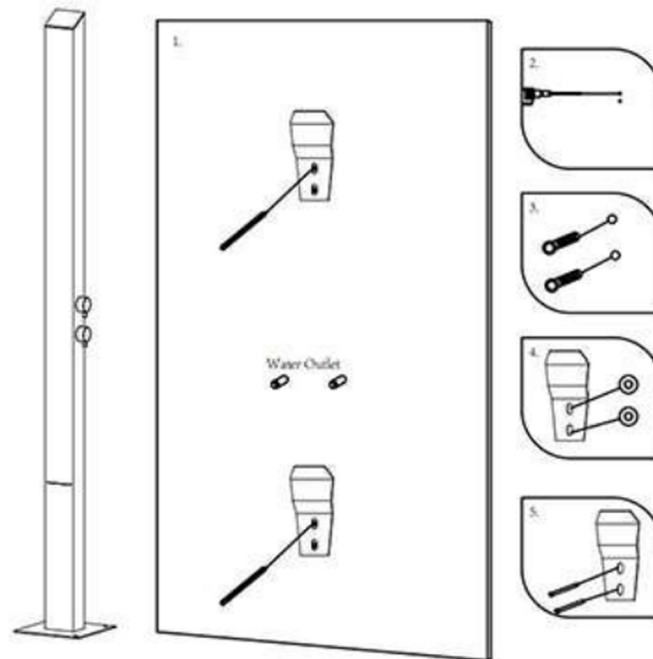

OPTION C:

COLD WATER CONNECTION ONLY THROUGH GARDEN HOSE

This shower can also be connected to a Garden Hose rather than your mains if you wish to use Cold Water Supply Only.

This connection can be used in either Option A or Option B.

The shower comes with all the necessary accessories attachments in your hardware pack for it to be connected to a garden hose.

These connections can be used either from the bottom of the unit, or if you want to connect it from the side or from the back then your plumber will need to punch an extra hole in the shower panel.



Fontana Provins Black Aluminum Outdoor 40L Solar Shower

Product Code: FS7501MB

Cleaning Recommendations

Modern faucet and shower products utilize a combination of materials to comply with needs of the market with regards to design and functionality. To avoid damage, it is necessary to use some caution when cleaning. Damage caused by improper treatment is not covered under the warranty.

Cleaning Materials for Faucets and Showers

- To remove lime scale, use only products made specifically for that purpose. Always follow the manufacturer's

Instructions when using:

- Do not use cleaners that contain hydrochloric formic acetic, or phosphoric acids, as there will cause considerable damage to finish and to plastic components.
- Never mix cleaning materials.
- Never use cleaners containing abrasives, do not use abrasive cleaning cloths, pads or sponges.

Cleaning Procedures

- Clean your faucets and shower products as and when required. Regular cleaning will prevent scale buildup and water spotting.
- Follow the label instructions, do not allow any cleaner to remain on the product for longer than necessary.
- When using spray cleaners, spray first onto a sponge or cloth do not spray directly onto product.
- After cleaning, rinse thoroughly with clean water to remove any cleaner residue.

Important

- Soap and shampoo residue can also cause damage to the product. Rinse well with clean water after use.
- If the surface is already damaged, harsh cleaning materials will cause further damage.

Scale removal & Technical data

The Spray channels of the over-head shower are protected by the self-cleaning system. If scale deposits are noticed in the spray Channels turn the water on lightly and tap the spray channels with a finger and a sponge.

