


## COMMERCIAL AUTOMATIC OIL RUBBED BRONZE SENSOR FAUCET SPECIFICATIONS



### Size

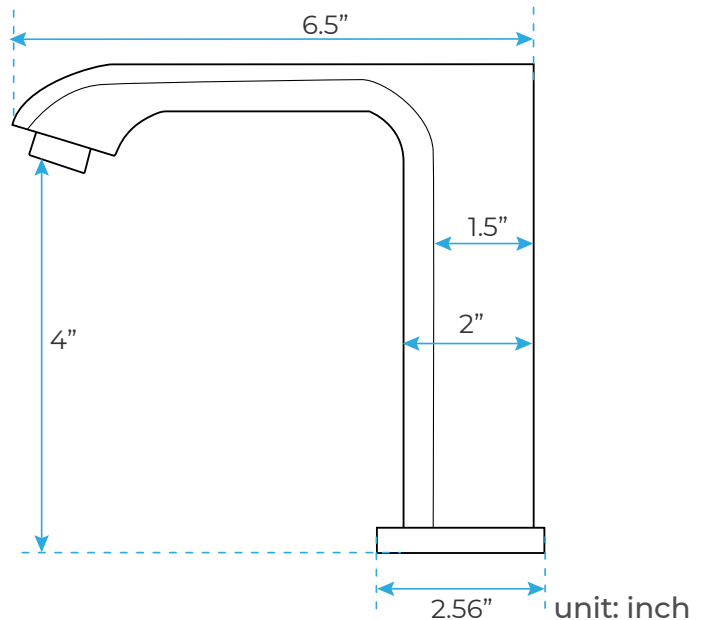


### Specs

Power: AC & DC 6V (batteries not included)  
 Water Consumption: 0.05Mpa-0.6Mpa  
 Detection Zone: 16-32 cm or adjustable  
 Motor valve lifespan: up to 500000 flushes  
 Battery lifespan: 100000 cycles  
 Static Power Consumption: 0.36mw  
 Working Power consumption: 0.5mw  
 Inductive Opening Time: < 1 second  
 Inductive Closing Time: < 2 second  
 Dia.of inlet / outlet pipe: G1/2"  
 Flux:  $\geq 0.07\text{L/S}$   
 Power Supply: Box Transformer (BOX)  
 Temperature Mixer: Below Deck Manual Mixing Valve (BDM)  
 Factory Default Timeout: 30s  
 Factory Default GPC: 0.75  
 Working pressure: 0.05 - 1.6 Mpa  
 Water flow: 1.2GPM (4.54 L/Min) @ 60PSI

### FEATURES

Commercial Grade Faucet, ADA Compliant, Cast Brass Spout, Quick Connect Fittings, Integrated Water Shut-off, Hygienic Line Flush, Water Usage and Battery Strength Reporting, Self-adapting Sensor

### Overview

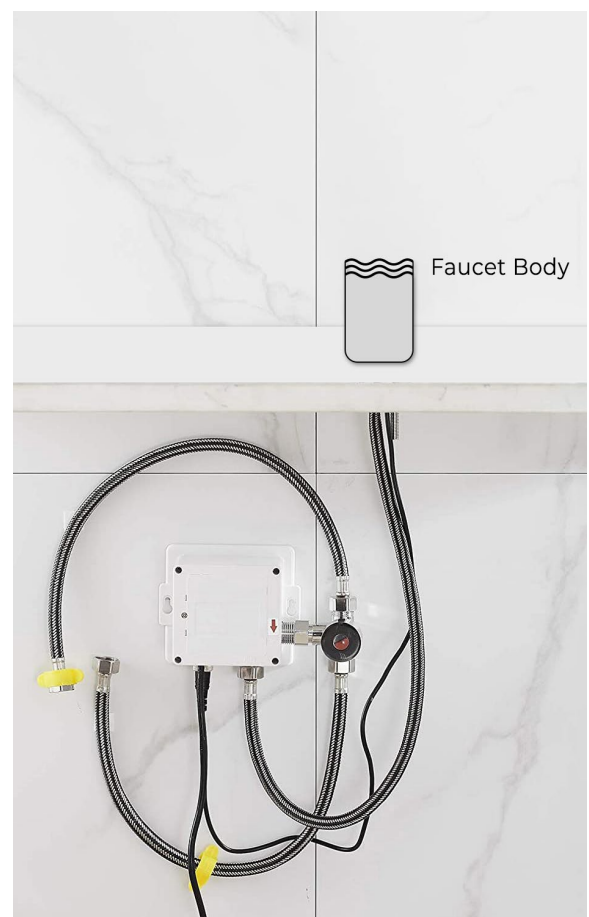

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.