

SIENA COMMERCIAL AUTOMATIC SENSOR FAUCET HOT & COLD WATER TEMPERATURE MIXER MIXING VALVE INSTALLATION INSTRUCTIONS



PRIOR TO INSTALLATION

Please read installation instructions below. All plumbing should be installed in accordance with applicable building codes and regulations.

Unpack and inspect the items for any shipping damages. If you find damages, do not install.

All products must be installed by a professional and certified plumber otherwise warranty may be voided.

POSSIBLE TOOLS REQUIRED*



Plumbers Tape



Tape Measure



Level



Adjustable Wrench



Hex Wrench



Thread Sealant



Drill



Pencil or Marker



Screwdriver

*not included

Technical Information

Product Dimensions: 2.3 x 2 x 2.36 inches (5.8 x 5.1 x 6 cm)

Color: Silver

Style: Water mixer valve

Finish: Chrome

Material: Brass

Installation Method: Screw-In

Maximum Pressure: 6 Bars

Exterior Finish: Chrome


Inlet Connection Size: 1/2 Inches (30.5 cm)

Inlet Connection Type: G1/2"

Outlet Connection Type: BPS thread

Outlet Connection Size: 1/2 Inches (30.5 cm)

Size

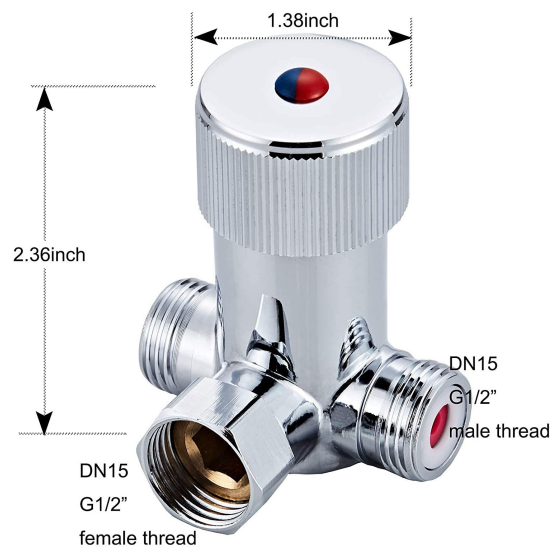

Temp. Control Thermostatic Mixer


Many automatic faucets do not have hot & cold handles to adjust the water temperature coming out of the spout, and normally installed to a single water supply only. This valve is used for automatic faucet to mix hot and cold water and to control water temperature. Normally it would be mounted under the sink with required temperature set.

Working Pressure: 0.05MPa-0.5MPa

Cold Water Temp: 0°C

Hot Water Temp: 85°C

Outlet Flow Rate: 20m³/h

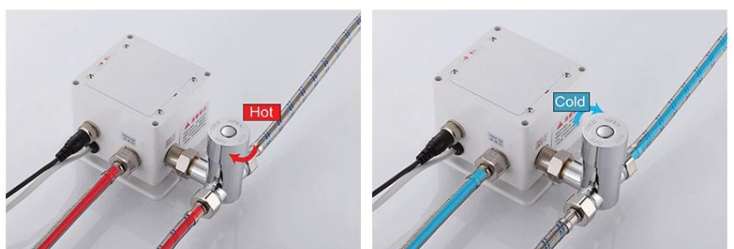

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.