



Fontana Carpi Brushed Gold Finish Goose Neck Deck Mount Automatic Commercial Sensor Faucet



Faucet Size

Specs

- Diameter of Inlet/outlet pipe: DN15
- Water Pressure: 0.05Mpa - 0.7Mpa
- Power: DC.6V
- Detection Zone: Factory set 25cm
- Ambient Temperature: 1 - 45° / 33.8 -113 °F
- Degree of protection by enclosure: IP56
- Overall Height: 11- 1/2" (measured from counter top to the highest part of the faucet)
- Spout Height: 7-3/4" (measured from counter top to the spout outlet)
- Spout Reach: 5-1/2" (measured from the center of the faucet base to the center of spout outlet)
- Mounting Type: Single Hole
- Number of Holes Required for Installation: 1
- Faucet Centers (Distance Between Handle Installation Holes): Single Hole
- Flow Rate: 1.3 GPM (gallons-per-minute)
- Maximum Deck Thickness: 1-5/8"
- Battery: 4*'AAA' size cells
- Operational water pressure range: 0.05 - 0.6MPa
- Water supply pipe size: DN15
- Ambient temperature range: 0.1 - 45 degrees
- Sensing distance: factory set 20cm
- Time delay: 0.5 seconds
- Operation duration: power will automatically cut off after continuous use for 60 seconds

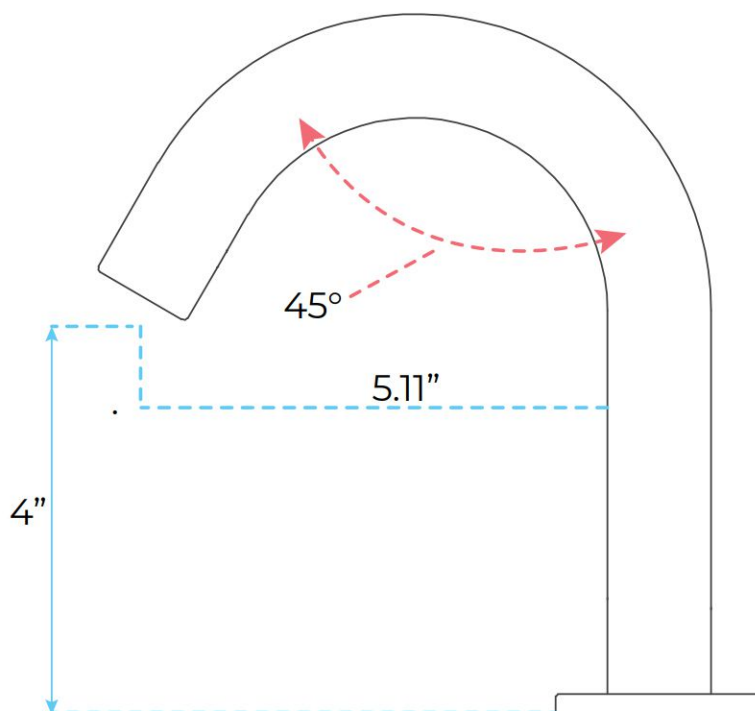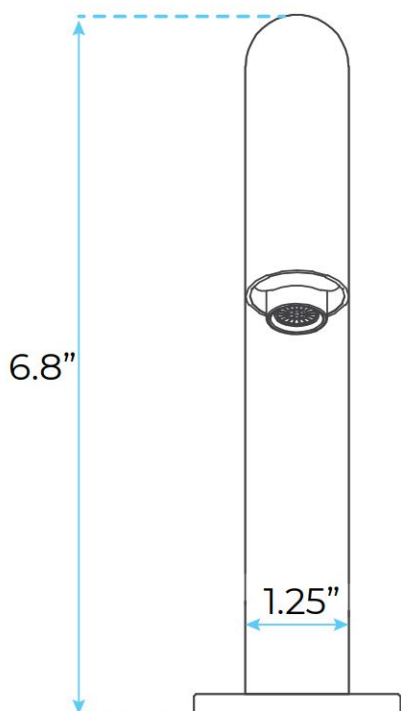

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.