


SIERRA LIGHT OIL RUBBED BRONZE LED SHOWER SYSTEM SPECIFICATIONS

Product shown is only for installation display purpose



1. Pull out the small tips on the top and bottom of the 3 handles

2. Use the "L" shape small Hex tool, turn counterclockwise to remove the square cover, then remove the trime plate

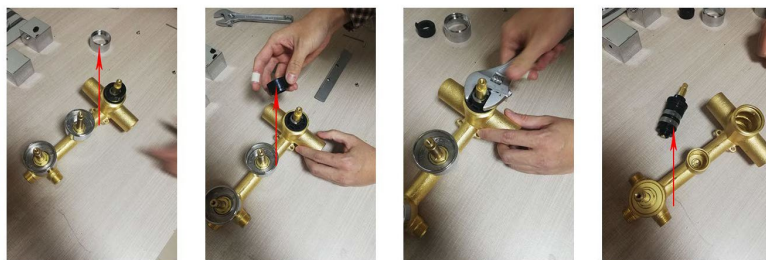


3. Turn counterclockwise to remove the "O" ring

4. Pick up the black part

5. Use the wrench to rotate counterclockwise to remove the valve core


6. Replace with the new one we sent you
7. Assemble the valve body.

Shower Head

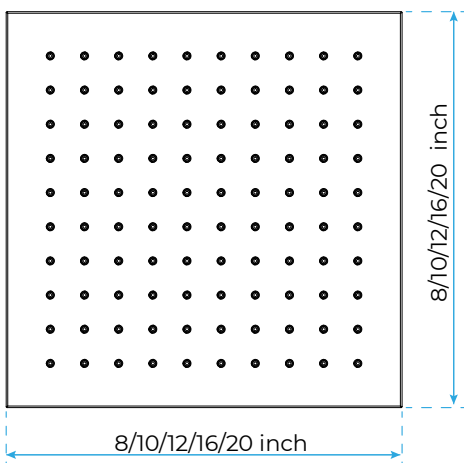


Flow Rate: 1.8 gpm (6.8 l/min) @ 80 psi

Hand Shower

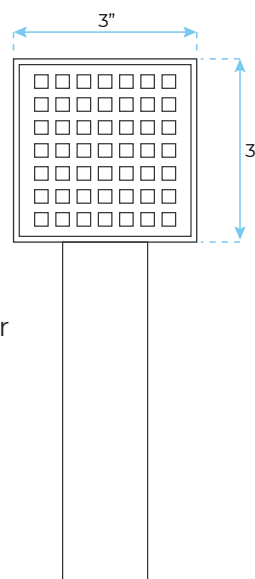

The minimum required water pressure is 0.05 MPa (0.5 bar).
Flow rate 2.5 GPM (9.5 LPM).

Body Jets

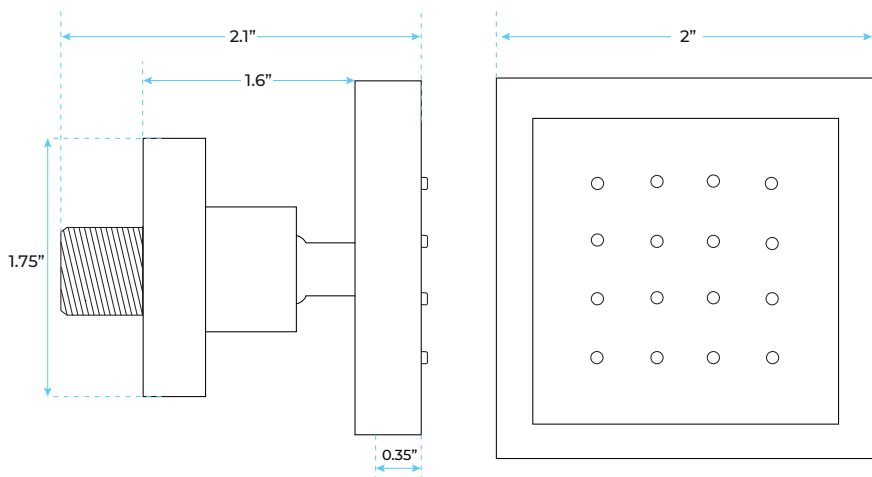

Thread Interface Size: G 1/2 Inch
Type: Fixed Rotatable Type
Installation Type: Wall Mounted
Material: Brass
Feature: Can rotate 360 degrees
Flow Rate: 1.5 GPM / 5.7 LPM (each Bodyspray)

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.