

# FONTANASHOWERS BRUSHED NICKEL CEILING MOUNT RAINFALL SHOWER SET WITH THERMOSTAT MIXER JET SPRAY AND HANDSHOWER SPECS



### **Specifications**

TYPE: SHOWER SET

VALVE CORE MATERIAL: CERAMIC SURFACE TREATMENT: BRUSHED SURFACE FINISH: BRUSHED NICKEL SHOWER HEAD MATERIAL: BRASS INSTALLATION TYPE: CEILING MOUNT

### **Shower Head Size:**

20"

Flow Rate 2.5 GPM / 9.5 LPM (rain Shower);

20"

#### (If you have opted for Led Shower head)

The LED light will change its color by detecting water temperature:

0-30°C (32-86°F): Blue LED 30-40°C (86-104°F): Green LED 40-50°C (104-122°F): Red LED


50-100°C (122-212°F): Flashing Red LED


Note: The LED lights are powered by water flow, and will be activated once the water is turned on.




# Fontana Showers 6-

### **Mixer Size:**





## **Hand Shower Size:**

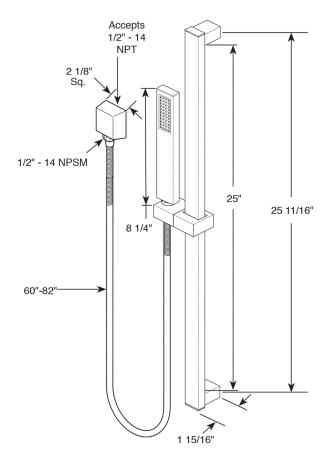


The minimum required water pressure is 0.05 MPa (0.5 bar).

Flow rate 2.5 GPM (9.5 LPM).





# **Body Jets Size:**

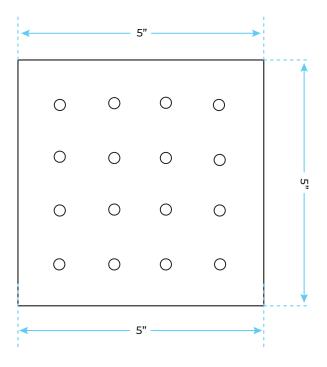

Body Spray Dimension: 3.9" x 3.9" (10cm x 10cm) Flow Rate: 1.5 GPM / 5.7 LPM (each bodyspray)

