


MELUN TOUCHLESS COMMERCIAL SOAP DISPENSER IN LIGHT OIL RUBBED BRONZE SPECIFICATIONS





1

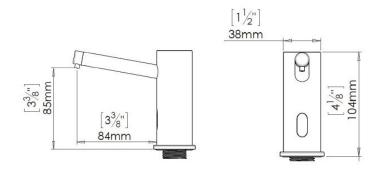

Specifications

INSTALLATION: LAVATORY MOUNTED

POWER SOURCE: 12 V TRANSFORMER

DEFAULT SOAP DOSAGE: 1.4 CC

SOAP VISCOSITY: 100-3800 CPS


USAGE: COMMERCIAL: RESIDENTIAL

INLET/OUTLET DIAMETER: G-1/2"

ACTIVATION: INFRARED SENSOR

SENSOR RANGE: SELF-ADJUSTING

ACTIVATION TIME: < 1 SECOND

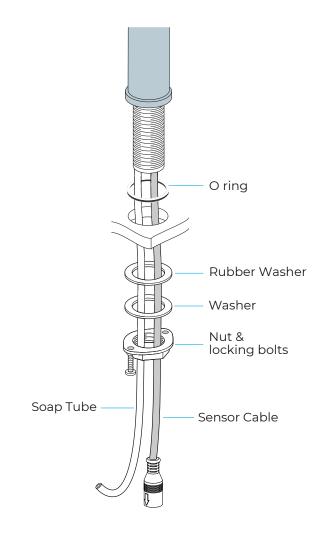



fontanashowers.com Customer Service: 800-684-4489