



BEFORE YOU BEGIN

Before you begin, please read the installation instructions below. Observe all local building and safety codes.

Unpack and inspect the items for any shipping damages. If you find damages, do not install.

Please note all products must be installed by a professional and certified plumber otherwise warranty might be voided.

POSSIBLE TOOLS REQUIRED*



Plumbers Tape



Tape Measure



Level



Adjustable Wrench



Hex Wrench



Thread Sealant



Drill



Pencil or Marker




Screwdriver


*not included

Ceiling Mount Shower Installation Instructions:


Step 1:

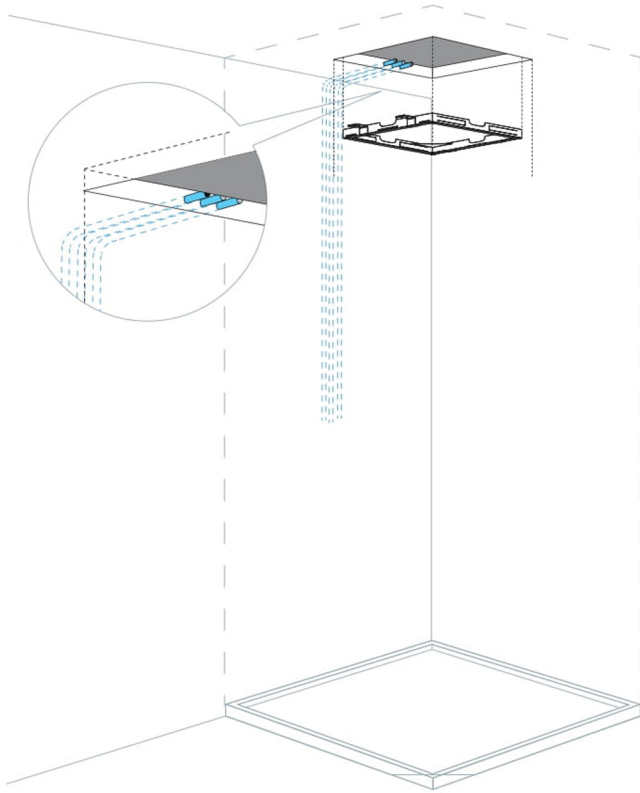


Step 2:

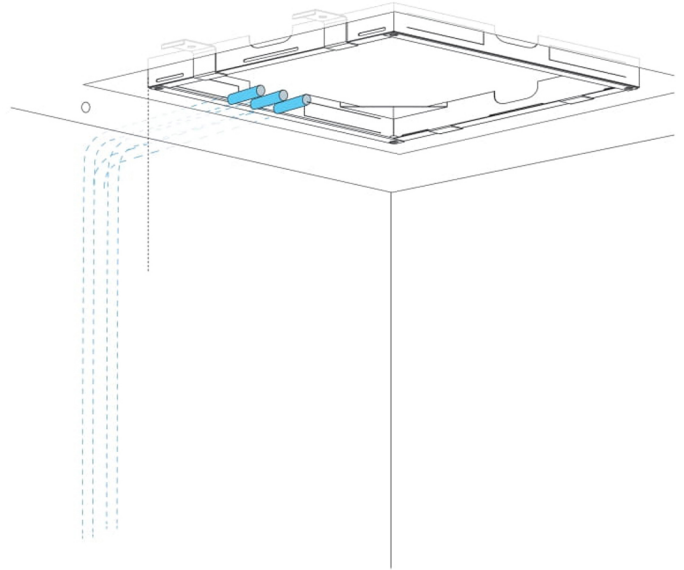

Step 3:

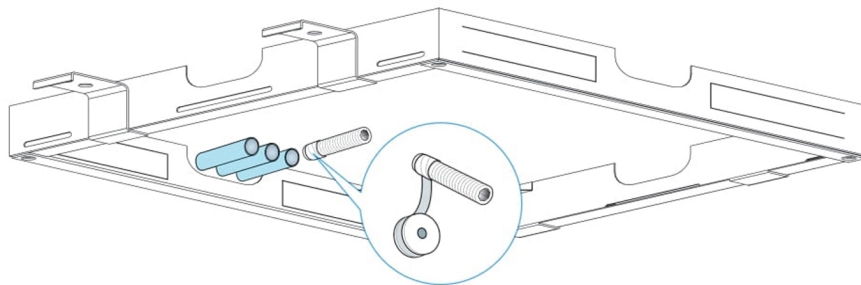


Step 4:

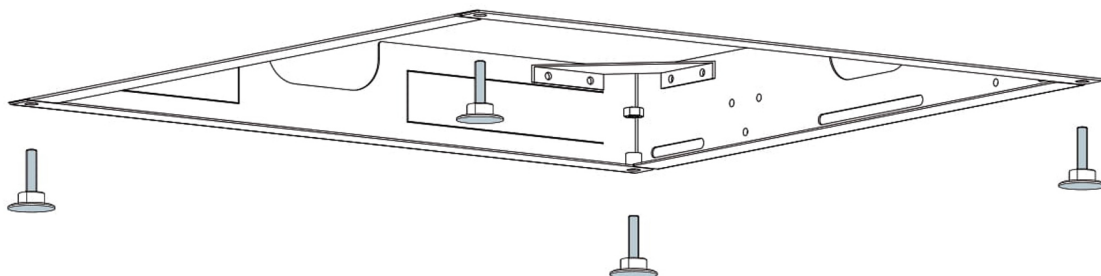


Fontana Meina Brushed Gold LED and Thermostatic Shower Set

Product Code: FS6055BG

Step 5:

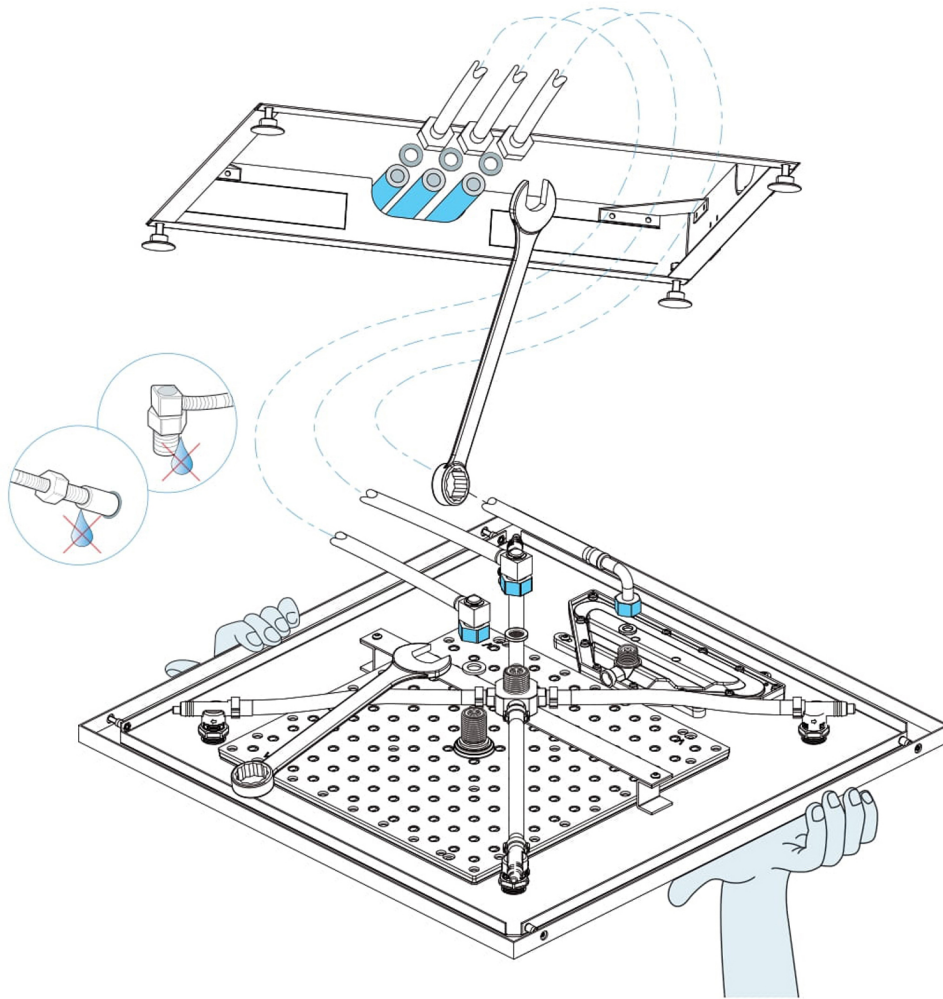


Step 6:

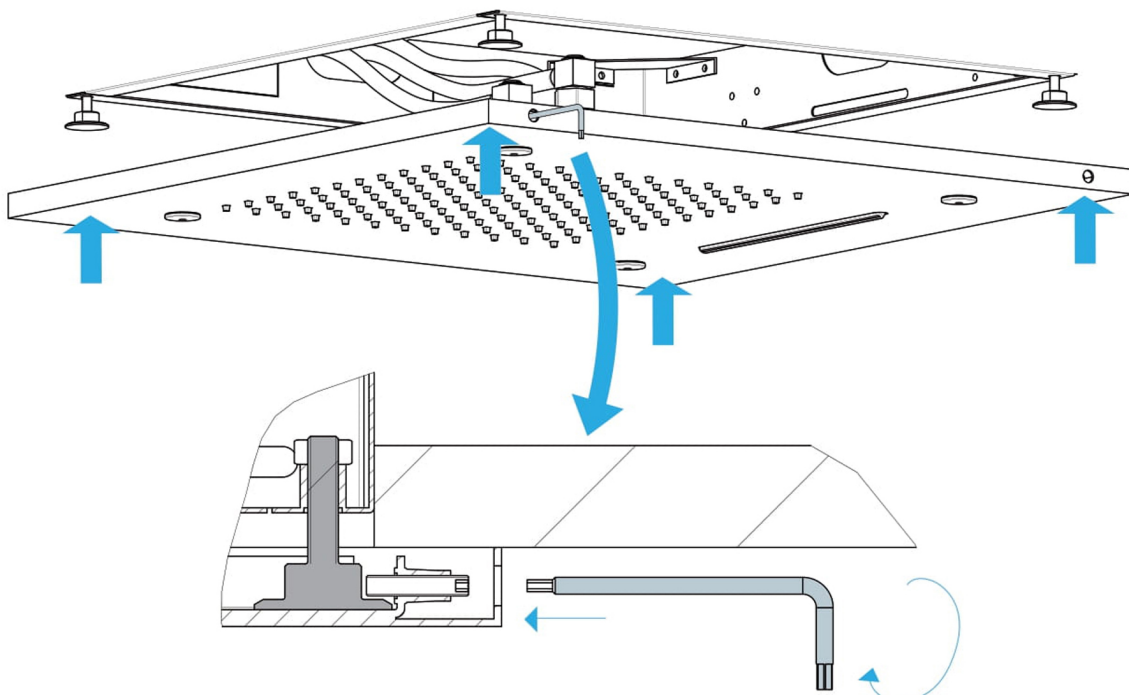


Fontana Meina Brushed Gold LED and Thermostatic Shower Set

Product Code: FS6055BG


Step 7:

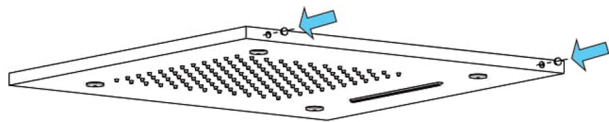

Step 8:

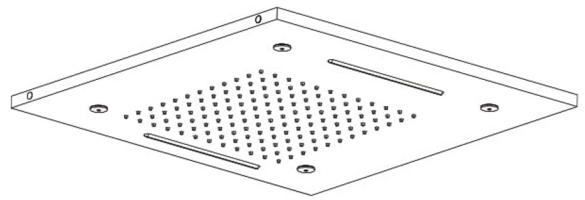

Step 9:

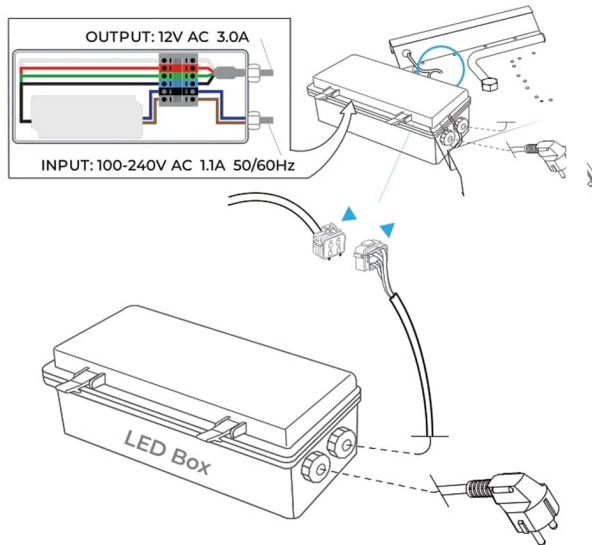


Step 10:




Body Jets Installation Instructions:


Step: 1

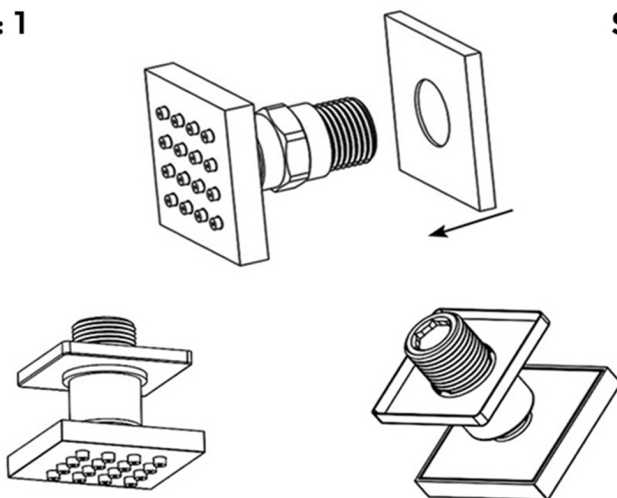


Step: 2

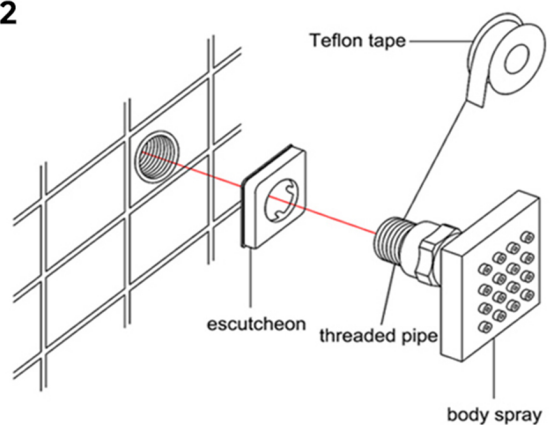

Step: 3

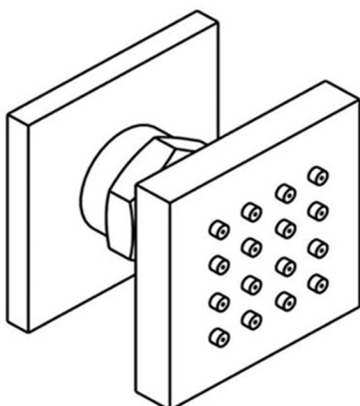


Step: 4

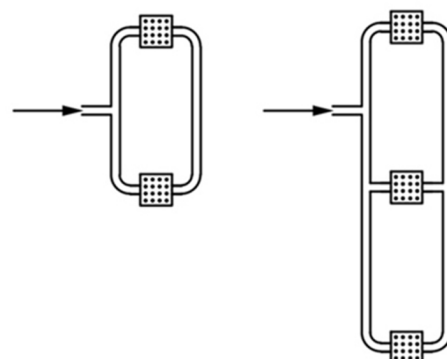


Essential Dimensions & Water Pipe Line:

Unit: mm/inch

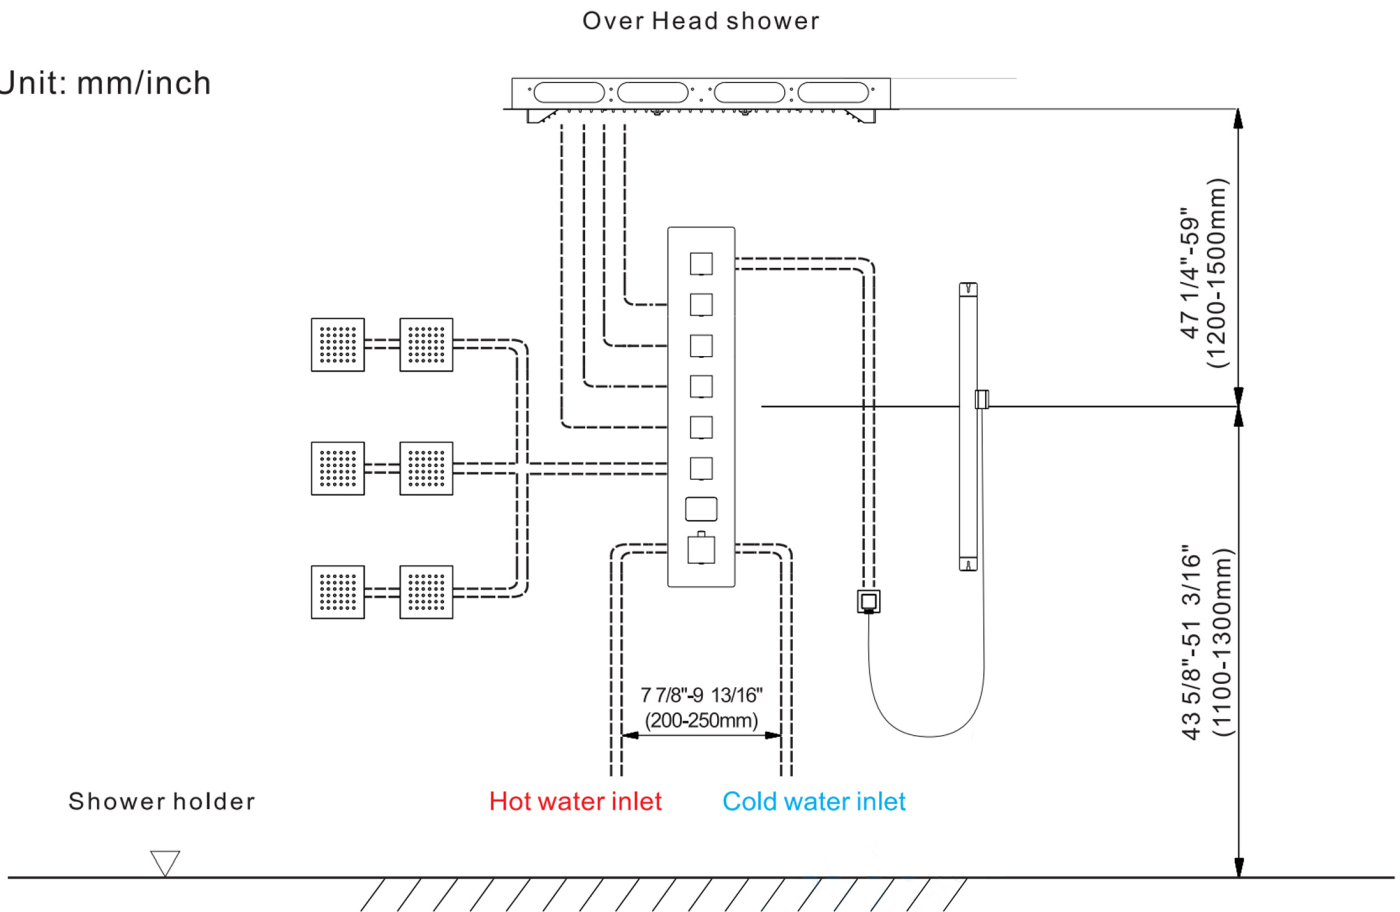


Essential Dimensions & Water Pipe Line:

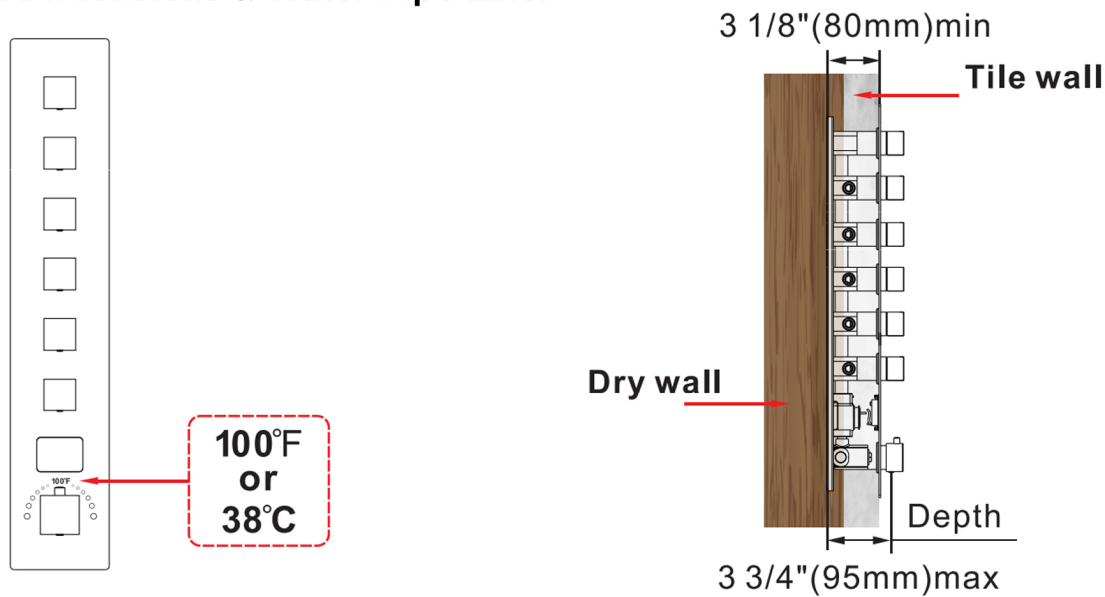

Notice:

1. The installation depth of the main body should be no less than 3 1/8" (80mm) and no more than 3 3/4" (95mm), including the thickness of the tile. Otherwise, the deck plate cannot be installed.
2. The opening size of ceramic tile shall be smaller than the deck plate size.

Piping Instructions before Tiling:

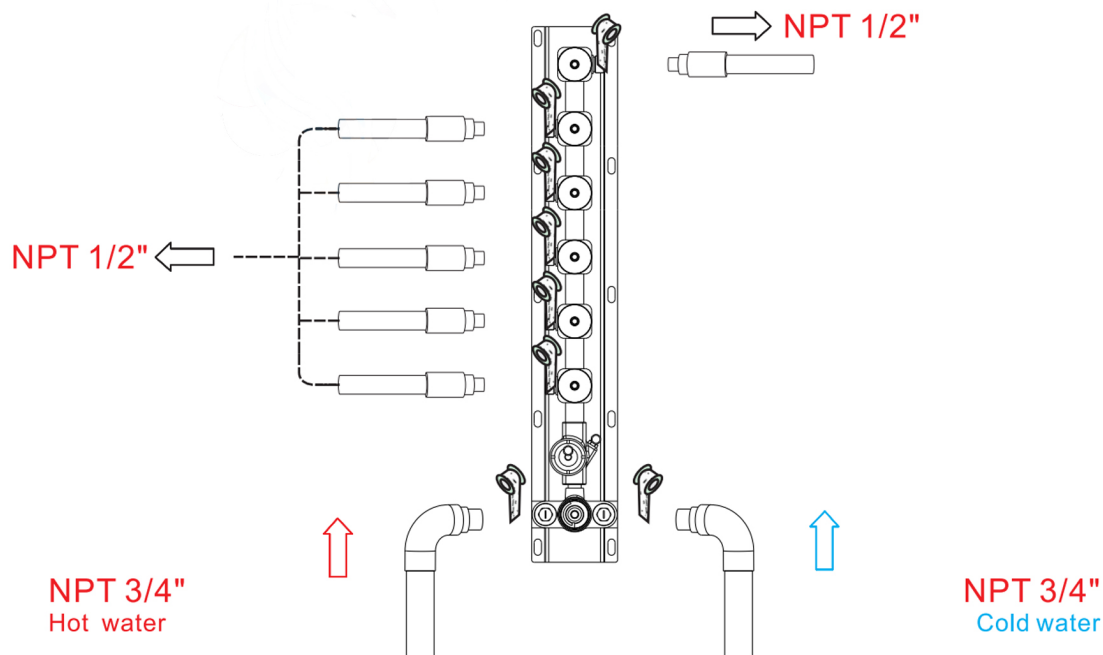


1.As shown in the figure, the inlet and outlet pipes are pre-buried. Please pay attention to the correct direction when installing the pre-buried main body.

2.Before tiling, turn on the water to test whether the left and right inlet pipes are tightly connected without leakage. Then, adjust the flow switch to the "on" position to check for leaks in the mixed outlet pipes.

Main Body Valve Installation:

Step 1

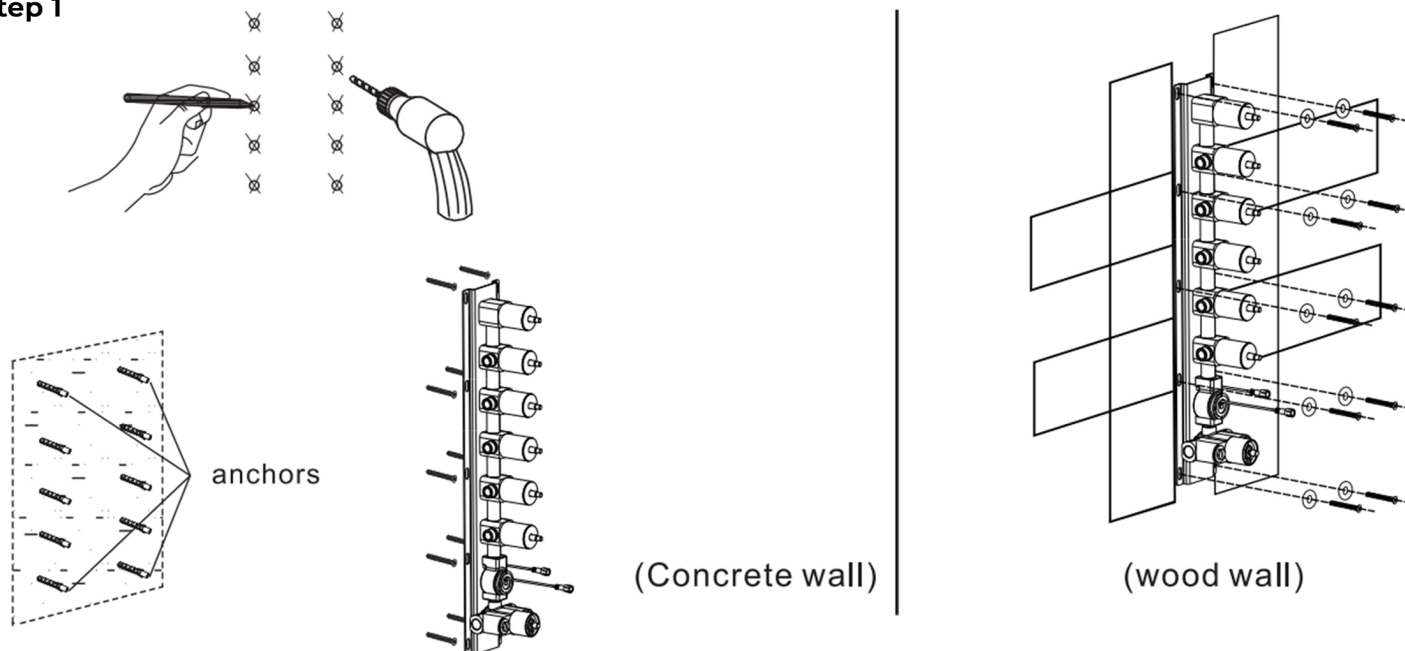

1.Make marks according to the size of the main body valve, and then drill anchors into the wall (concrete wall).


2.Lock the main body to wood directly with screws (wood wall).

3.When installing the main body, please mark the UP side up and do not install it upside down.

Fontana Meina Brushed Gold LED and Thermostatic Shower Set

Product Code: FS6055BC

Step 2


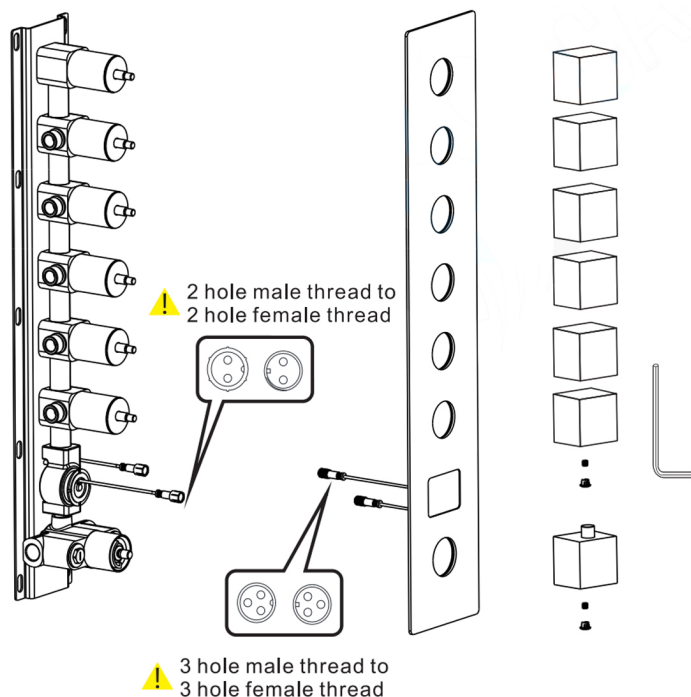


Precautions for Handwheel Installation

1. The line can't be misplaced; it should be kept in line. Otherwise, the water temperature of 100°F or 38°C will not be correct.



2. Please ensure that the plastic locating ring (A) and handwheel locating pin (B) are kept in the same line with 100°F or 38°C. Otherwise, the water temperature will be incorrect.




Note:

- Do not remove the white wear ring; otherwise, the handwheel will be damaged.
- Water flow control: clockwise Turn-down and stop, anti-clockwise Turn-up to max


1. Please install the deck plate, water diverters, and water diverter rods step by step.
2. Install the handle with the screw and handle cap.

Hand Shower Installation Instructions:


Step 1:

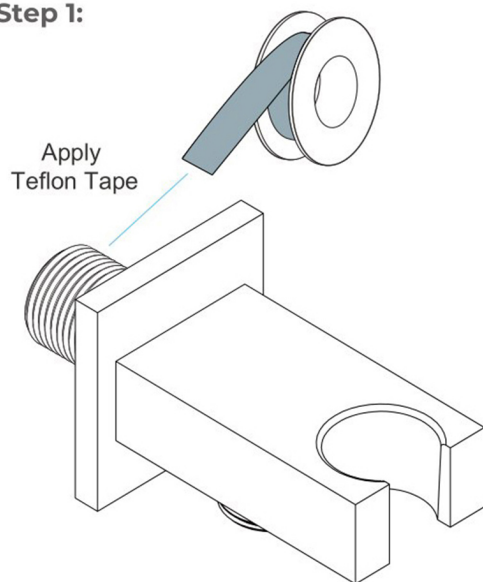


Step 2:

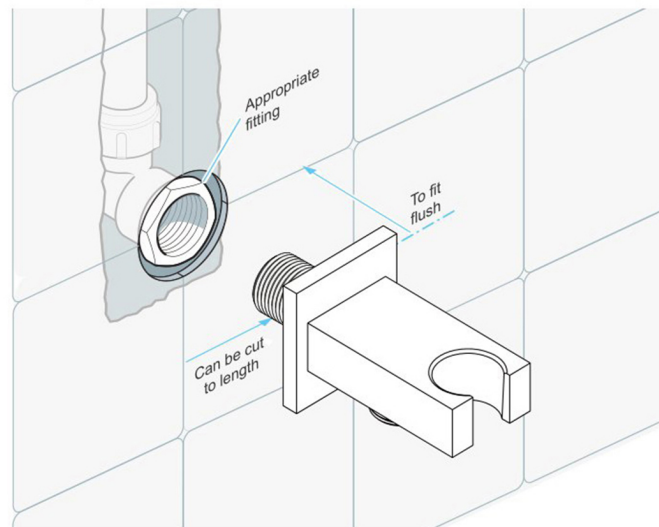

Step 3:

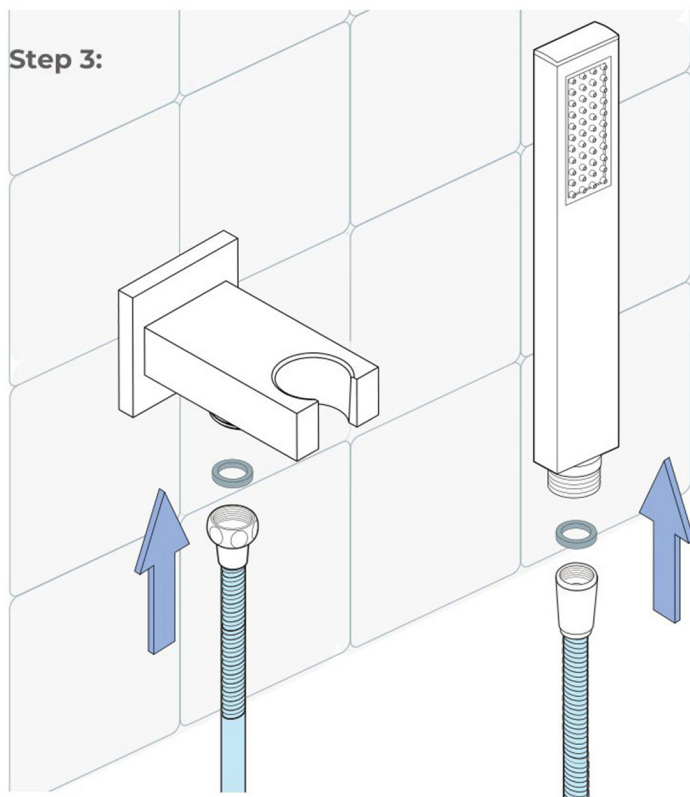

Step 4:

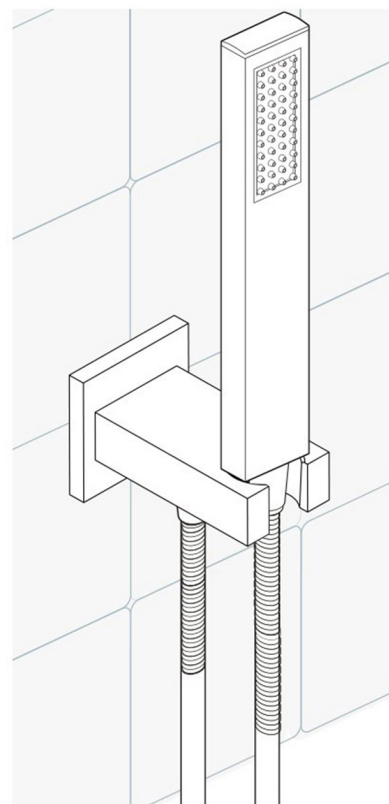

Hand Shower Outlet Installation

• Complete the outlet pipework ensuring it ends in an appropriate 15mm x 1/2" BSP female thread elbow.

Note: This fitting is not supplied as variations in installations require the selection of a suitable solder or compression fitting.

• Install the 'Wall Outlet', thread long male 1/2" BSP into the appropriate female fitting using PTFE tape to give a watertight joint.

Note: The thread can be cut to size if required. Make sure that all debris is removed from the connector and the section that has been cut is dressed correctly, before installation.

Fontana Meina Brushed Gold LED and Thermostatic Shower Set

Product Code: FS6055BG

General Information:

All products manufactured and supplied by Fontana are safe and comply to legislative requirements. Providing they are installed correctly and receive regular maintenance in accordance with these instructions your user experience will not be affected.

Care & Cleaning:

1. The product can be cleaned with warm water, a mild soap and a clean soft cloth.
2. Clean progressively and gently.
3. It is not required to use any abrasive cleaning pads, wire wool or cloths to clean the product.
4. Avoid a vigorous cleaning action, as this could contribute to denaturing and dulling
5. Abrasive or strong cleaning products containing ammonia, bleaches, alcohol, dyes, acids (hydrochloric, formic, phosphorus, chlorine or acetic) will be not be affected.
6. If using a spray cleaner, apply the cleaning agent onto a soft cloth, never directly spray onto the product as the cleaner may enter gaps and openings and cause damage. Do not allow the cleaner to remain on the product for a period of time. After cleaning, rinse thoroughly with clean water.

