


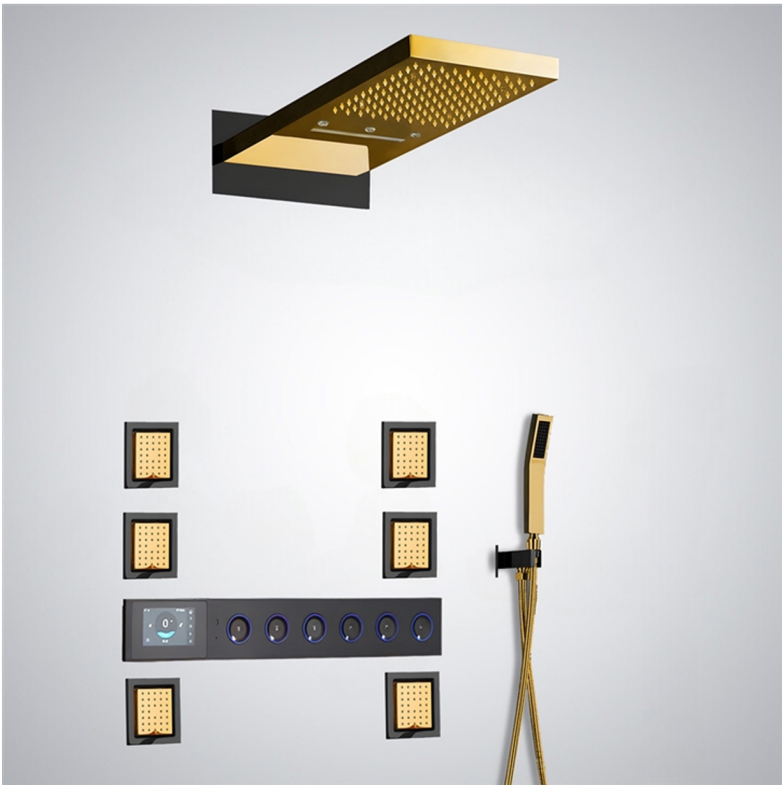


BEFORE YOU BEGIN

Before you begin, please read the installation instructions below. Observe all local building and safety codes.

Unpack and inspect the items for any shipping damages. If you find damages, do not install.

Please note all products must be installed by a professional and certified plumber otherwise warranty might be voided.


POSSIBLE TOOLS REQUIRED*

- | | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| Plumbers Tape | Tape Measure | Level | Adjustable Wrench | Hex Wrench |
|  |  |  |  | |
| Thread Sealant | Drill | Pencil or Marker | Screwdriver | |

*not included


Shower Head Installation Instructions:

Step 1:

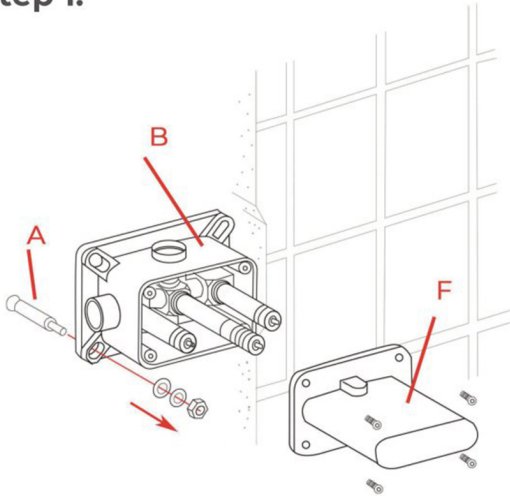


Remove the protective cover (F). Mark the positions and drill holes to suit the anchors (A). Install the anchors (A) and fix the rough-in valve (B) into the wall with screws. Use a level to ensure that the rough-in valve (B) is straight and level. (Important: Flush the water supply to remove any dirt and debris before installing the valve body).

Step 2:

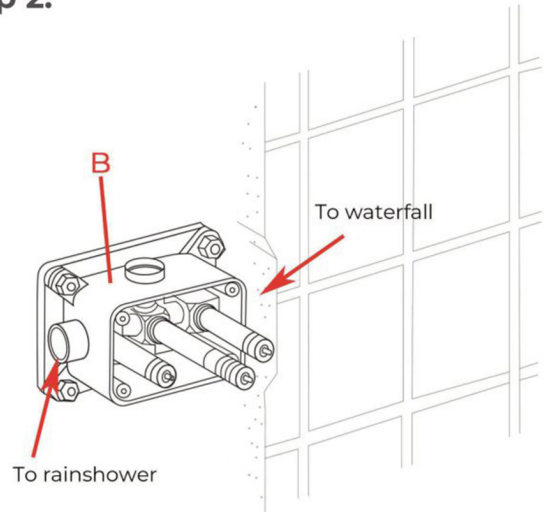


Wrap Teflon tape around the pipe threads and connect water supply lines and in-wall pipes (not included) as desired to the rough-in valve (B). Turn on the water supply and open the cartridge to check for leakage. Then put on the protective cover and finish the wall surrounding the valve. (Note: Test the water pressure after the pipe connections have been made and before the finished wall material is installed).

Step 3:

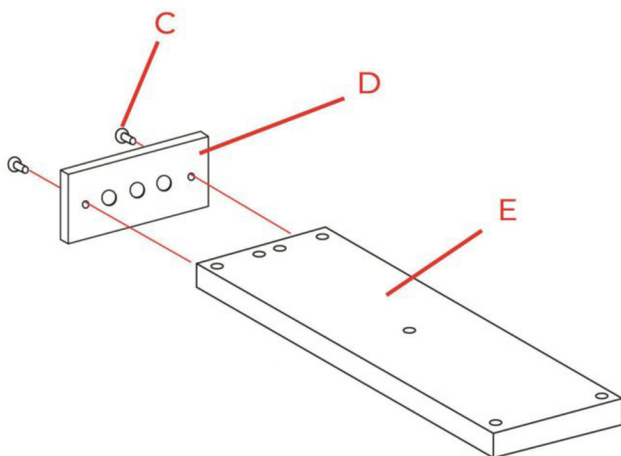


Fix the escutcheon (D) to the showerhead (E) with screws (C).

Step 4:

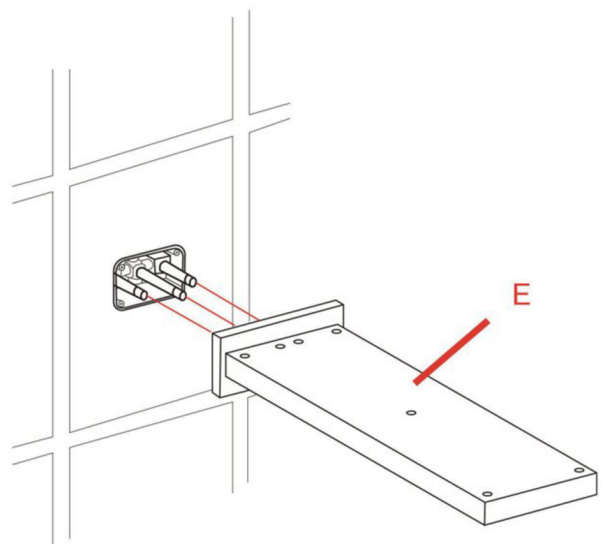

Remove the protective cover when the finished wall is completed. Then, install the showerhead (E) and press it against the finished wall.

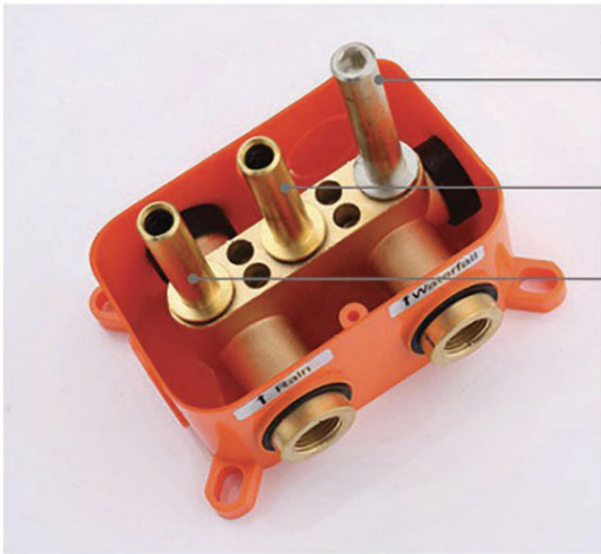

Support role ,strong safe

Rainfall outlet role

Rain shower outlet role

- Big water flow and comfortable spay, Elegant design and save space of shower room



The installation of concealed plastic box
in right way




It's installed
upside down


The installation of concealed plastic box
in wrong way

Hand Shower Installation Instructions:


Step 1:

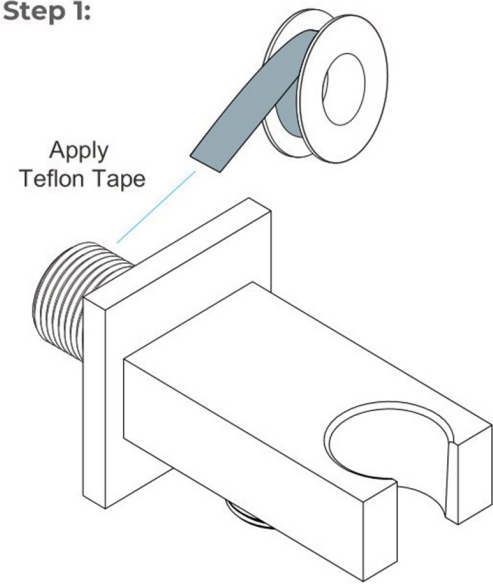


Step 2:

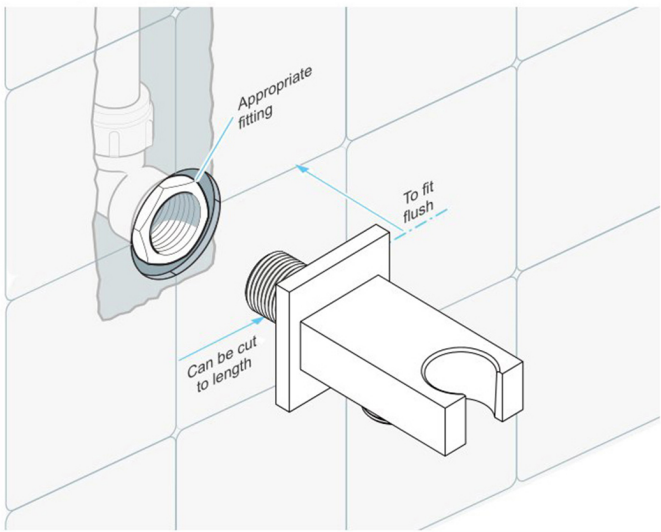

Step 3:

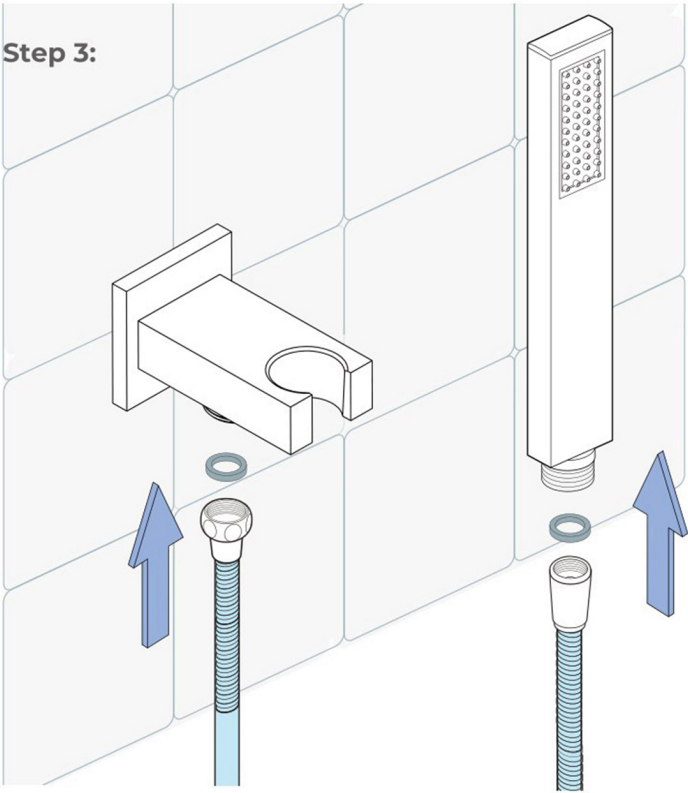

Step 4:

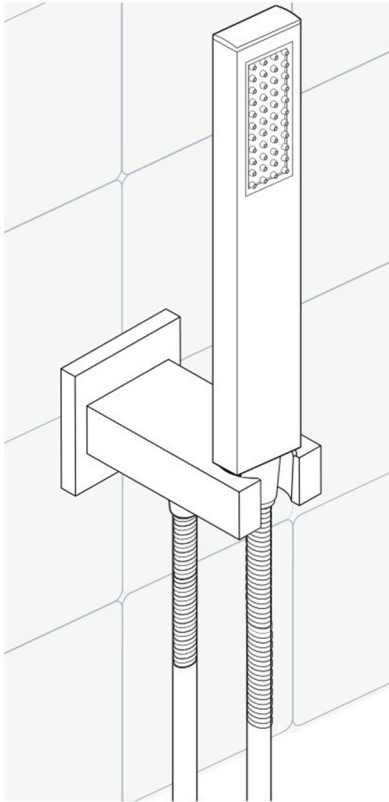

Hand Shower Outlet Installation

• Complete the outlet pipework ensuring it ends in an appropriate 15mm x 1/2" BSP female thread elbow.


Note: This fitting is not supplied as variations in installations require the selection of a suitable solder or compression fitting.

• Install the 'Wall Outlet', thread long male 1/2" BSP into the appropriate female fitting using PTFE tape to give a watertight joint.


Note: The thread can be cut to size if required. Make sure that all debris is removed from the connector and the section that has been cut is dressed correctly, before installation.

Body Jets Installation Instructions:


Step: 1

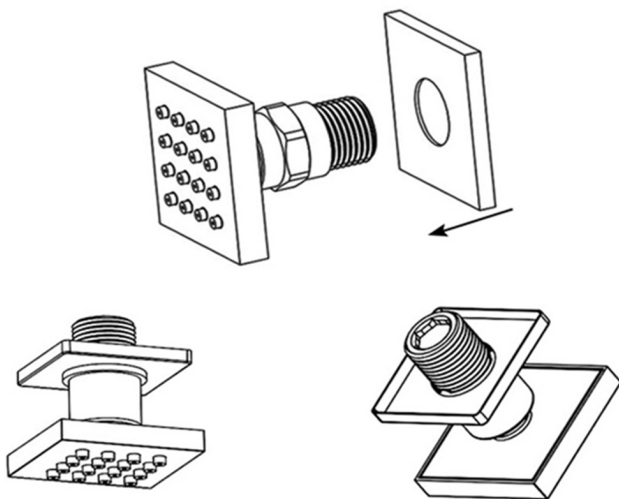


Step: 2

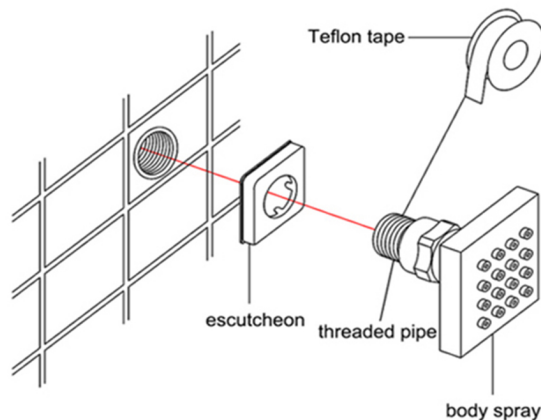

Step: 3

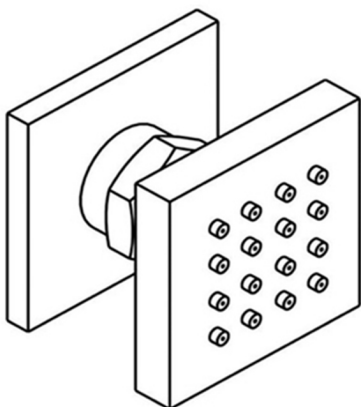


Step: 4

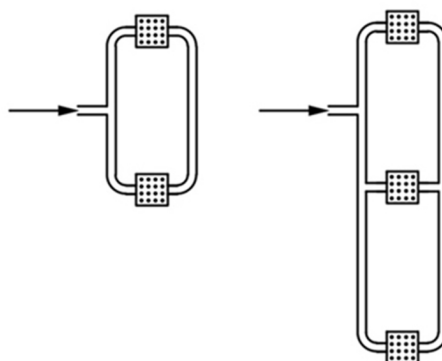


Control Panel Installation:

1. Open an hole on the rough wall where you plan to put the control panel, and embed the power cable in advance.

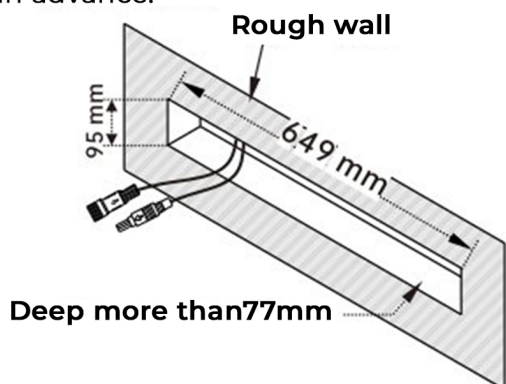


2. After the power cable passes through the hole of the wall box, fix the wall box into the hole and secure with screws.

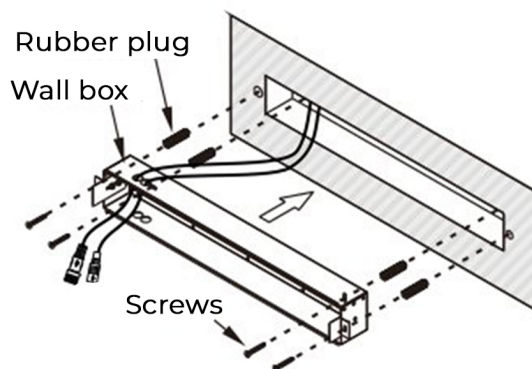


Fontana Grado Gold And Matte Black LED Thermostatic Shower Set

Product Code: FS7792MB


3. Laying tiles on rough walls.

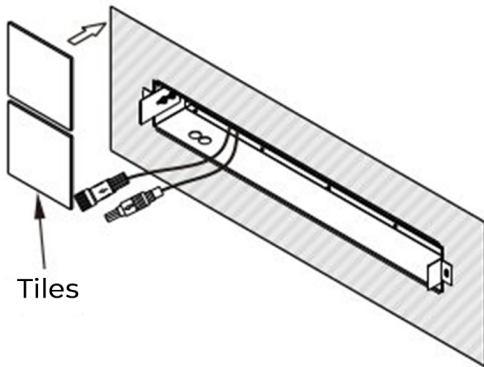


4. After connect the control cable of control panel with extended control cable. Putting the control panel into the wall box.

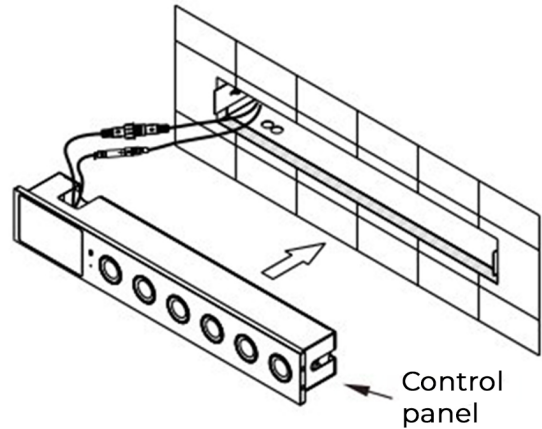

5. The card block is inserted into the corresponding slot of the panel.

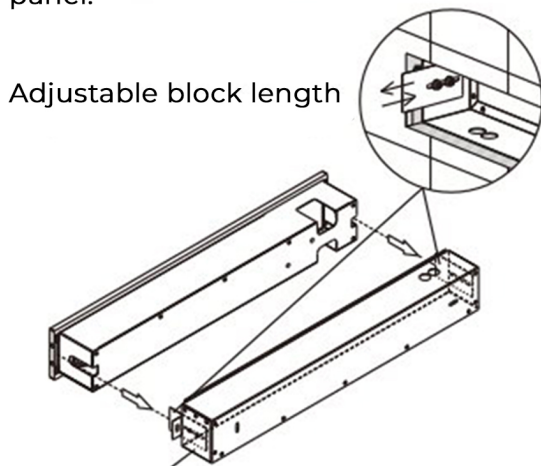


6. Lock the control panel from two sides with M5 × 4 hexagonal fastening screws.

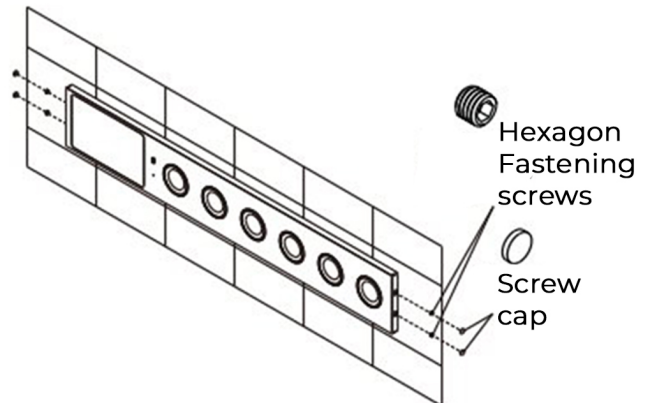

It is recommended to place the digital thermostatic mixer box and music box above the ceiling of the bathroom.

Cable Connection Drawing:

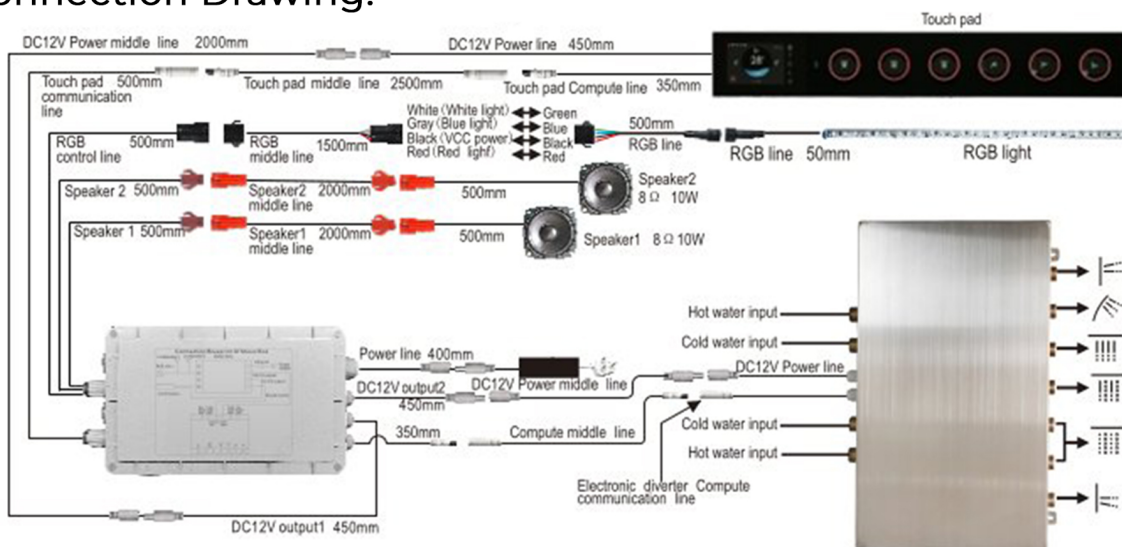

General Information:

All products manufactured and supplied by Junoshowers are safe and comply to legislative requirements. Providing they are installed correctly and receive regular maintenance in accordance with these instructions your user experience will not be affected

Care & Cleaning

1. The product can be cleaned with warm water, a mild soap and a clean soft cloth.
2. Clean progressively and gently.
3. It is not required to use any abrasive cleaning pads, wire wool or cloths to clean the product.
4. Avoid a vigorous cleaning action, as this could contribute to denaturing and dulling
5. Abrasive or strong cleaning products containing ammonia, bleaches, alcohol, dyes, acids (hydrochloric, formic, phosphorus, chlorine or acetic) will be not be affected.
6. If using a spray cleaner, apply the cleaning agent onto a soft cloth, never directly spray onto the product as the cleaner may enter gaps and openings and cause damage. Do not allow the cleaner to remain on the product for a period of time. After cleaning, rinse thoroughly with clean water.

